

TM 11-6625-333-24P

---

TECHNICAL MANUAL

ORGANIZATIONAL, DIRECT SUPPORT, AND  
GENERAL SUPPORT  
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST  
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND  
SPECIAL TOOLS)

FOR

STANDING-WAVE-RATIO POWER  
METER ME-165/G  
(NSN 6625-00-682-4464)

---

HEADQUARTERS, DEPARTMENT OF THE ARMY

24 AUGUST 1981



TECHNICAL MANUAL  
NO. 11-6625-333-24P

HEADQUARTERS  
DEPARTMENT OF THE ARMY  
WASHINGTON, DC, 24 AUGUST 1981

**ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT  
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST  
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)  
FOR  
STANDING-WAVE-RATIO POWER METER ME-165/G  
(NSN 6625-00-682-4464)**

Current as of 30 March 1981

**REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS**

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended changes to Publications and Blank Forms), or DA Form 202S-2, located in back of this manual direct to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, NJ 07703.

In either case, a reply will be furnished direct to you.

**Table of Contents**

		Page	Illus Figure
SECTION	I. Introduction .....	1	
GROUP	II. Repair Parts List .....	5	
	00 Standings-Wave-Ratio Power Meter ME-165/G .....	5	1-4
	01 Front PNL Assembly (See Group 00 for parts)		
	0101 Terminal Board Assembly (See Group 00 for parts)		
	0102 Turret Assembly .....	13	
SECTION III	Special Tools List (Not applicable) .....		
	IV. National Stock Number and Part Number Index .....	14	



## SECTION I INTRODUCTION

---

### 1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organization, direct support, and general support maintenance of the ME-165/G. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

### 2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. *Section III.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

### 3. Explanation of Columns

a. *Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. *Source, Maintenance, and Recoverability (SMR) Codes.*

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA	Item procured and stocked for anticipated or known usage.
XB	Item is not procured or stocked. If not available through salvage, requisition.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

### NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the fourth position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
O	Support item is removed, replaced, used at the organizational level.
F	Support item is removed, replaced, used at the direct support level.
H	Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
F	The lowest maintenance level capable of complete repair of the support item is the direct support level.
H	The lowest maintenance level capable of complete repair of the support item is the general support level.
Z	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
F	Reparable item. When uneconomically rep-

arable, condemn and dispose at the direct support level.

**H** - Reparable item. When uneconomically repairable, condemn and dispose at the general support level.

c. *National Stock Number*. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Federal Supply Code for Manufacturer (FSCM)*. The FSCM is a 5-digit numeric code listed in SB 708-41/42 which is used to identify the manufacturer, distributor, or Government agency, etc.

e. *Part Number*. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

#### **N O T E**

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

f. *Description*. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M)*, Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit*. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates

that no specific quantity is applicable, (e.g., shims, spacers, etc).

## **4. Special Information**

The following publications pertain to the ME-165/G and its components:

TM 11-6625-333-15, Standing-Wave-Ratio Power Meter ME-165/G

## **5. How to Locate Repair Parts**

a. When National stock number or part number is unknown.

(1) *First*. Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second*. Find the illustration covering the functional group to which the item belongs.

(3) *Third*. Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth*. Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First*. Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphanumeric sequence cross-referenced to the illustration figure number and item number.

(2) *Second*. After finding the figure and item number, locate the figure and item number in the repair parts list.


## **6. Abbreviations**

Not applicable.

**(Next printed page is 4)**



TM 11-6625-333-24P

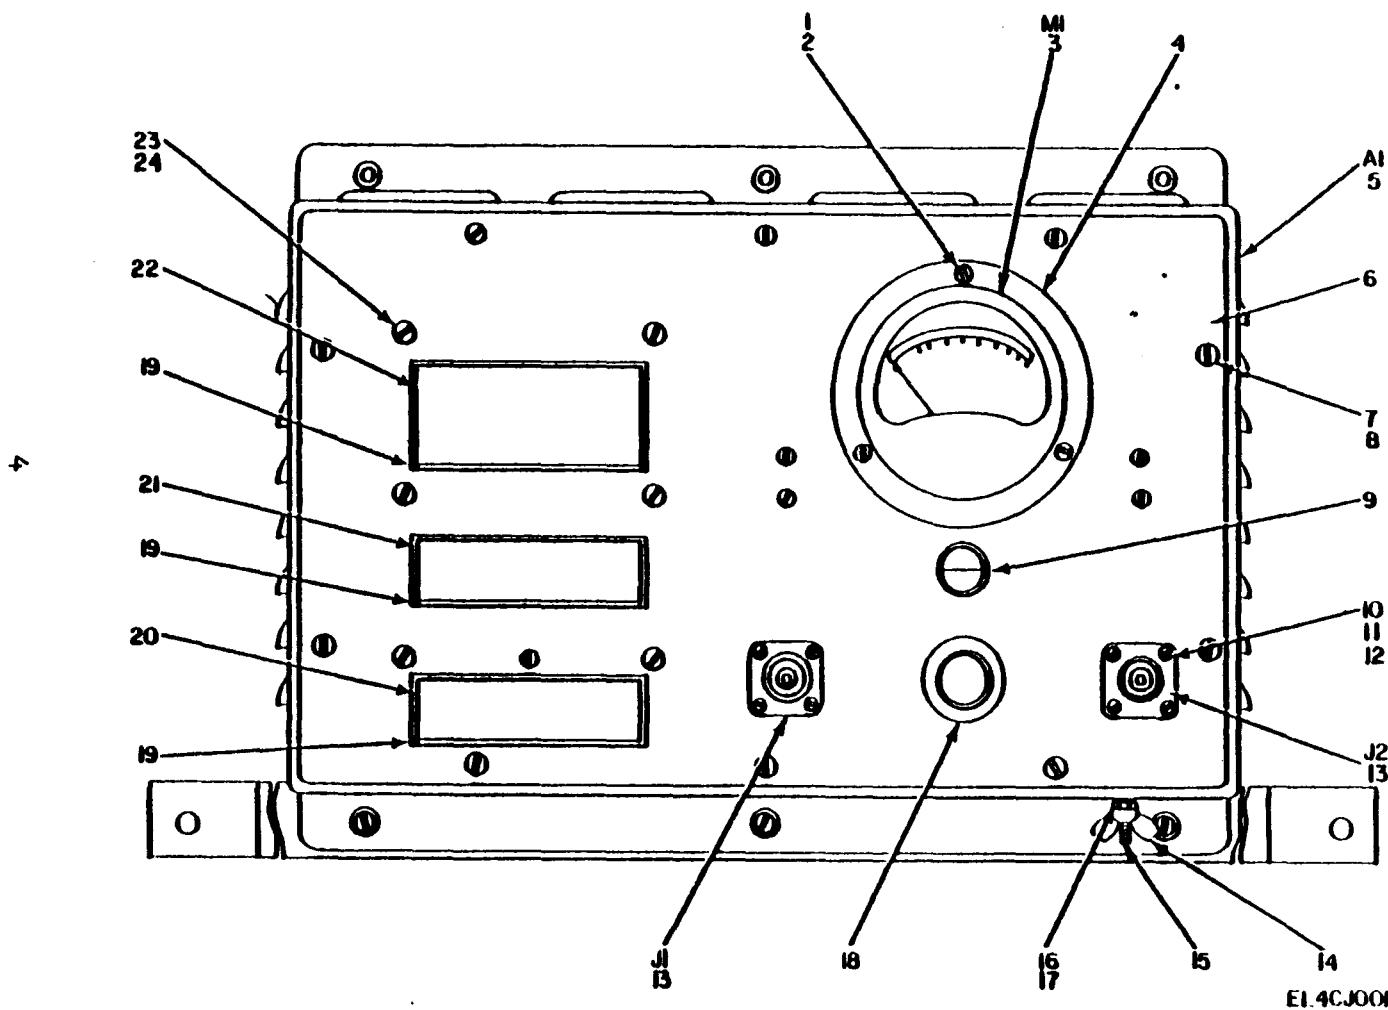

SECTION II				TM11-6625-333-24P									
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) FSCM	(6) PART NUMBER	DESCRIPTION		(7) USABLE ON CODE	(8) QTY INC IN UNIT	U/M			
GROUP 00 STANDING WAVE RATIO POWER METER													
ME-165/G													
1	1	XDFZZ	5310-00-934-9747	96906	MS35649-262	NUT,PLAIN,HEXAGO		EA	6				
1	2	XDHZZ		96906	MS35321-31	SCREW MACHINE		EA	3				
1	3	XDOZZ	6625-00-678-9669	80063	SMB349728	METER,STANDING		EA	1				
1	4	XDFZZ		80063	SMD349743	CASE,METER		EA	1				
1	5	XBHHH		80063	SM-D-349721	FRONT PANEL ASSY		EA	1				
1	6	XDFZZ		80063	SMD349722	PANEL		EA	1				
1	7	XDFZZ	5305-00-984-6192	96906	MS35206-244	SCREW,MACHINE		EA	10				
1	8	PAHZZ	5310-00-880-5978	96906	MS15795-807	WASHER,FLAT		EA	10				
1	9	XDHZZ		80063	SM-D-349721-2	KNOB 145OW USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE R19		EA	1				
1	10	XDFZZ	5310-00-934-9739	96906	MS35649-41	NUT,PLAIN,HEXAGO		EA	7				
1	11	XDFZZ	5305-00-207-7465	96906	MS35214-14	SCREW,MACHINE		EA	8				
1	12	XDFZZ	5310-00-543-2410	96906	MS35338-40	WASHER,LOCK		EA	2				
1	13	XDHZZ	5935-00-331-3580	81350	UG-588/U	CONNECTOR,RECEPTACL USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE 04		EA	2				
1	14	XDFZZ	5310-00-080-8495	96906	MS35425-39	NUT,PLAIN,WING		EA	1				
1	15	XDFZZ	5305-00-082-6721	96906	MS51957-81	SCREW,MACHINE		EA	1				
1	16	XDFZZ	5310-00-543-2740	96906	MS35333-74	WASHER,LOCK		EA	1				
1	17	XDFZZ	5310-00-903-5966	96906	MS51971-1	NUT,PLAIN,HEXAGO		EA	1				
1	18	XDOZZ	5355-00-168-3106	72512	1470C	KNOB		EA	1				
1	19	XDFZZ		80063	SMD349721-10	SCREW,DRIVE		EA	12				
1	20	XDFZZ		80063	SMB349726	PLATE,INSTRUCTION		EA	1				
1	21	XDFZZ		80063	SMB349727	PLATE,INSTRUCTION		EA	1				
1	22	XDFZZ		80063	SMB349725	PLATE,IDENT		EA	1				
1	23	XDFFF		80063	SMD349721-19	SCREW,MACHINE		EA	6				
1	24	XDFZZ	5310-00-261-8278	96906	MS35338-100	WASHER,LOCK		EA	6				


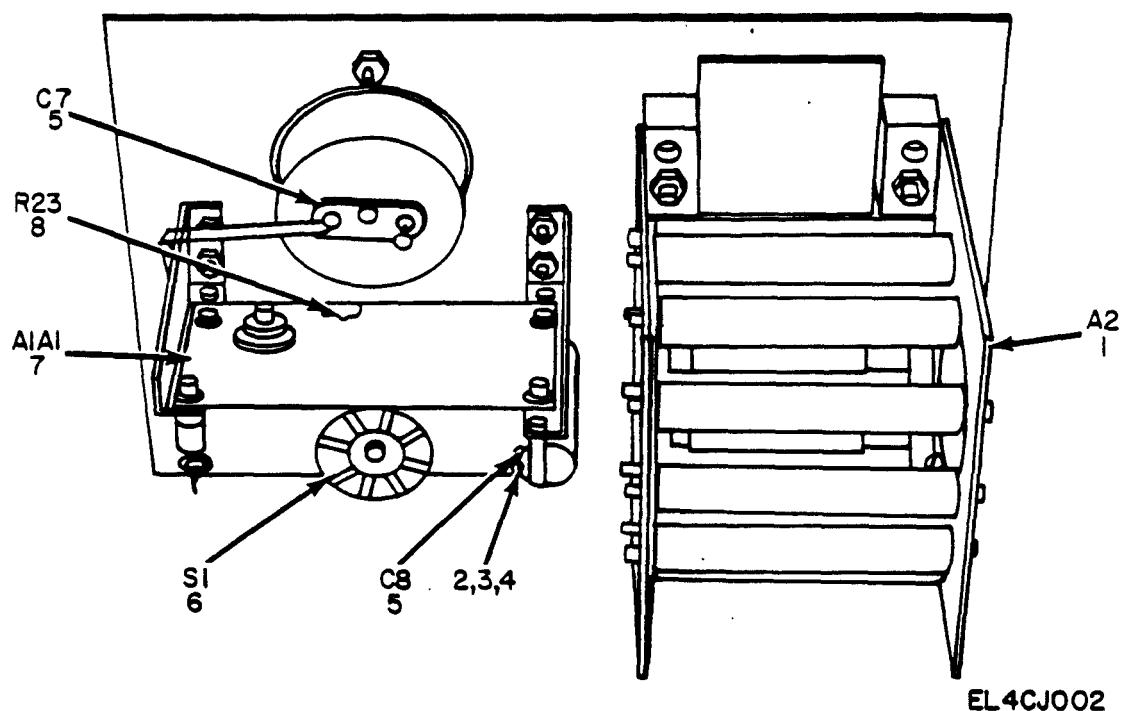


Figure 2. Standing-Wave-Ratio Power Meter ME-165/G, Interior View.

TM11-6625-333-24P								
SECTION II (1) ILLUSTRATION (a)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT	
2	1	XBHHH		80063 SM-D-349729	TURRET ASSEMBLY	EA	1	
2	2	XDFZZ		96906 MS35231-14	SCREW,MACHINE	EA	2	
2	3	XDHZZ	5310-00-880-5976	96906 MS15795-806	WASHER,FLAT	EA	9	
2	4	PAHZZ	5310-00-543-2410	96906 MS35338-40	WASHER,LOCK	EA	1	
2	5	PAHZZ	5910-00-822-5682	81349 CK62BX102K	CAPACITOR,FIXED,CE USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE C7,C8	EA	1	
2	5	PAHZZ	5910-00-138-1681	81349 CK62BX102M	CAPACITOR,FIXED,CER USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE C6,C7	EA	1	
2	6	PAHZZ	5930-00-685-9937	71590 PA279-1694	SWITCH,ROTARY	EA	1	
2	7	XBHHH		80063 SM-B-349741	TERMINAL BD ASSY	EA	1	
2	8	XBHZZ		81349 RV4NATSB253B	RESISTOR,VARIABLE USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE R23	EA	1	
2	8	XDFZZ	5905-00-542-8052	81349 RV4BAYSB253B	RESISTOR,VARIABLE,N USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE R17	EA	1	


TM 11-6625-333-24P

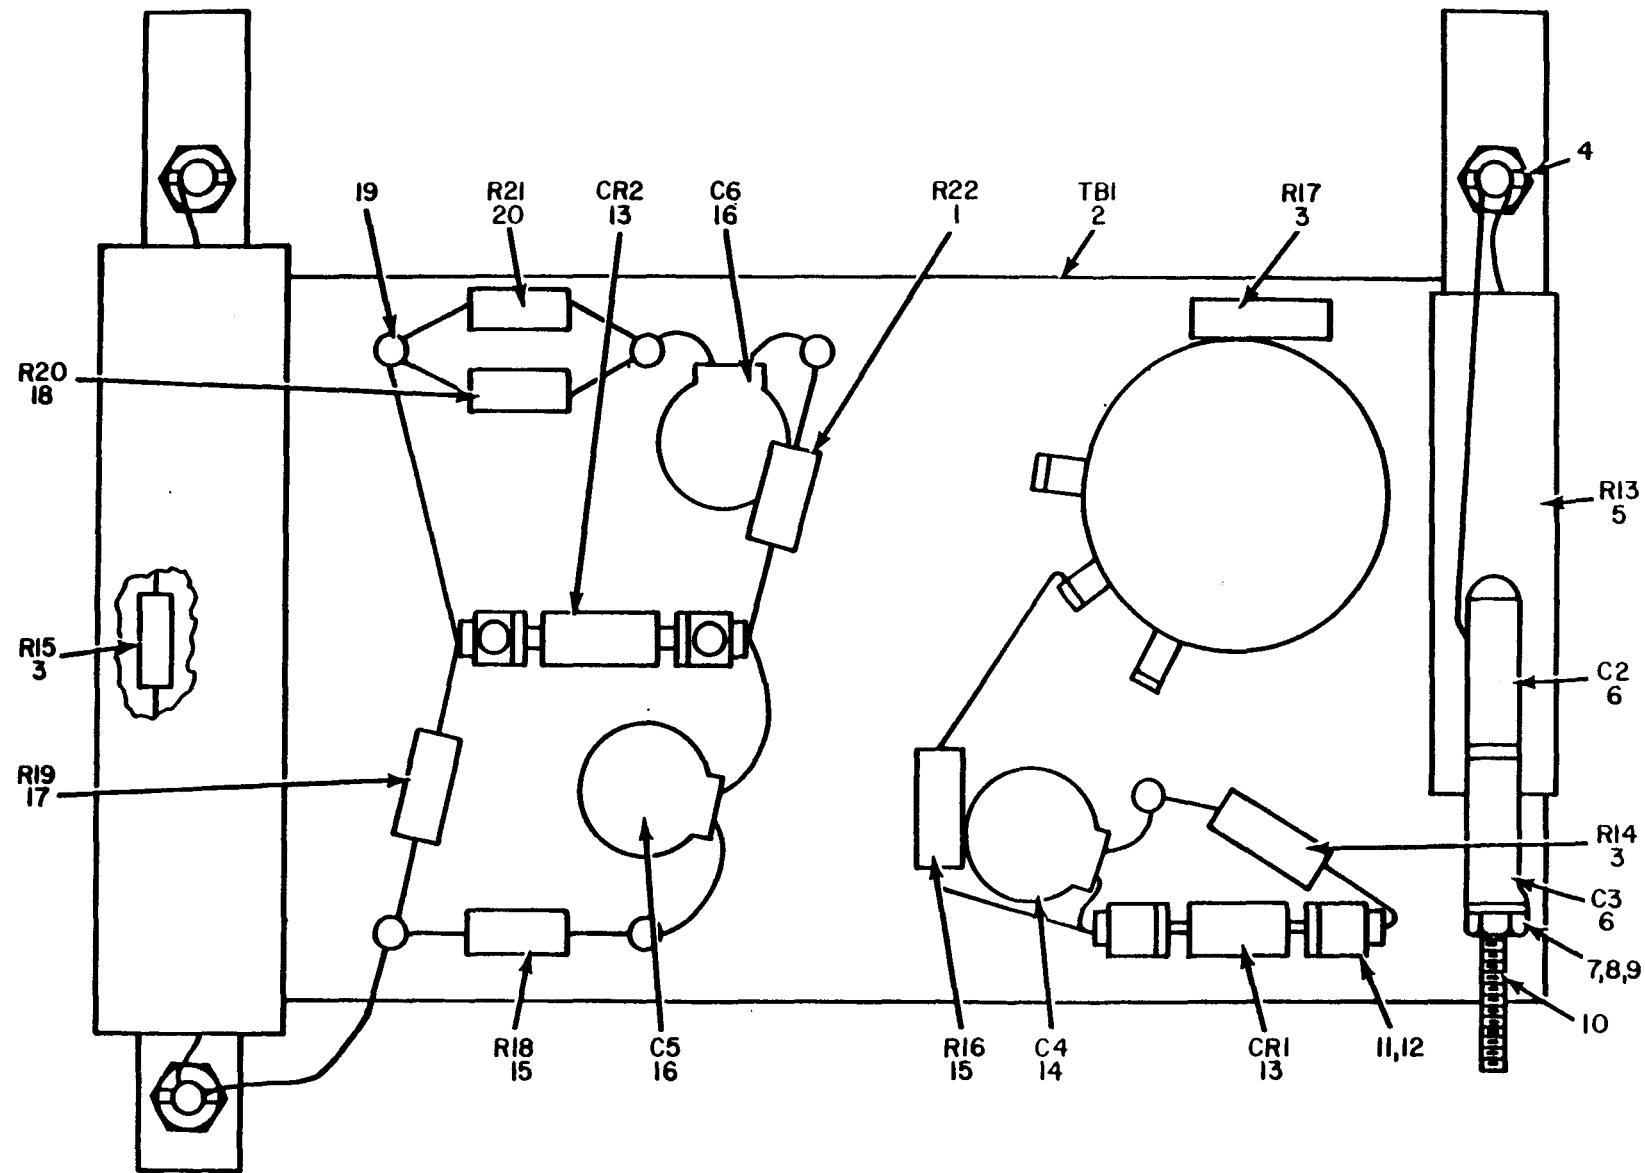

EL4CJ003

Figure 3. Standing-Wave-Ratio Power Meter ML-165/6, Component Location.

TM11-6625-333-24P									
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	(6) DESCRIPTION	USABLE ON	(7)	(8) QTY INC IN UNIT
								CODE	U/M
3	1	PAHZZ	5905-00-882-0070	81349	RL205562J	RESISTOR,FXD,CMPSON USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE R16		EA	1
3	1	PAHZZ	5905-00-882-0070	81349	RL20S562J	RESISTOR,FIXED,FILM USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE R21		EA	1
3	2	XDFZZ		80063	SMB349742	TERMINAL BOARD		EA	1
3	3	PAHZZ	5905-00-717-3339	81349	RL20S510J	RESISTOR,FIXED,FILM USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 59 REF DES WILL BE R22		EA	1
3	3	PAHZZ	5905-00-717-3339	81349	RL20S510J	RESISTOR,FIXED,F USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE R16,R18		EA	2
3	4	XDFZZ	5940-00-296-5946	81312	750	TERMINAL,STUD		EA	3
3	5	XDFZZ		80063	SM-D-349721-9	RESISTOR,FIXED,WW USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE R13		EA	1
3	5	PAHZZ	5905-00-685-9939	56289	25N1T1200	RESISTOR,FIXED,WW USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE R15		EA	1
3	6	XDFZZ	5910-00-984-8373	81349	CM15FD101GP3	CAPACITOR,FIXED		EA	1
3	7	XDFZZ	5310-00-934-9747	96906	MS35649-262	NUT,PLAIN,HEXAGO		EA	5
3	8	PAHZZ	5310-00-045-4007	96906	MS35338-41	WASHER,LOCK		EA	2
3	9	XDFZZ	5940-00-050-2308	96906	MS35431-3	TERMINAL,LUG		EA	1
3	10	XDFZZ	5305-00-576-7679	96906	MS35231-28	SCREW,MACHINE		EA	1
3	11	XDHZZ		71729	X2090BG	CLIP,ELECTRICAL		EA	4
3	12	XDFZZ		80063	SMB349741-3	RIVET,TUBULAR		EA	4
3	13	XDFZZ	5961-00-669-6884	81349	JAN1N277	SEMICONDUCTOR DEVIC USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 59 REF DES WILL BE C1,C2		EA	2
3	13	XDHZZ		81349	JAN1N69A	SEMICONDUCTOR,DIODE USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE REVERSED		EA	2
3	14	PAHZZ	5910-00-676-7547	73899	VC13G8	CAPACITOR,VARIABLE, USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE C3		EA	1
3	15	PAHZZ	5905-00-779-8376	81349	RL20S122J	RESISTOR,FIXED,FILM USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE R18,R19,R21		EA	3
3	15	PAHZZ	5905-00-779-8376	81349	RL2051224	RESISTOR,FXD,CMPSON USED ON ALL ORDERS PRIOR TO NO 3219-PP-55 REF DES WILL BE R20,R22		EA	2
3	16	PAHZZ	5910-00-822-5682	81349	CK62BX102K	CAPACITOR FIXED CR USED ON ALL ORDERS PRIOR TO NO 3219-PP-55 REF DES WILL BE C4,C5		EA	2
3	17	XDFZZ	5905-00-681-8657	81349	RV4NAYSD103B	RESISTOR,VARIABLE,N USED ON ALL ORDERS PRIOR TO 3219-PP-59 59 REF DES WILL BE H23		EA	1
3	18	XDHZZ		80063	SM-D-349721-6	RESISTOR,FIXED,WW USED ON ORDER NO 3219-PP-59 AND 3241-PP-55 REF DES WILL BE R20		EA	1
3	18	PAHZZ	5905-00-193-5186	56289	10N1T4K	RESISTOR,FIXED,WW USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE R13		EA	1
3	19	XDFZZ		80063	SMB349741-1	TERMINAL,LUG		EA	6
3	20	PAHZZ	5905-00-900-3559	81349	RL20S271J	RESISTOR,FIXED,FILM USED CN ORDER N. 3219-PP-59 AND 3241-PP-59 59 REF DES WILL BE R14,R15,R17		EA	3
3	20	PAHZZ	5905-00-900-3559	81349	RL20S271J	RESISTOR,FXD,CMPSON USED ON ALL ORDERS PRIOR TO NO 3219-PP-59 REF DES WILL BE R14		EA	1

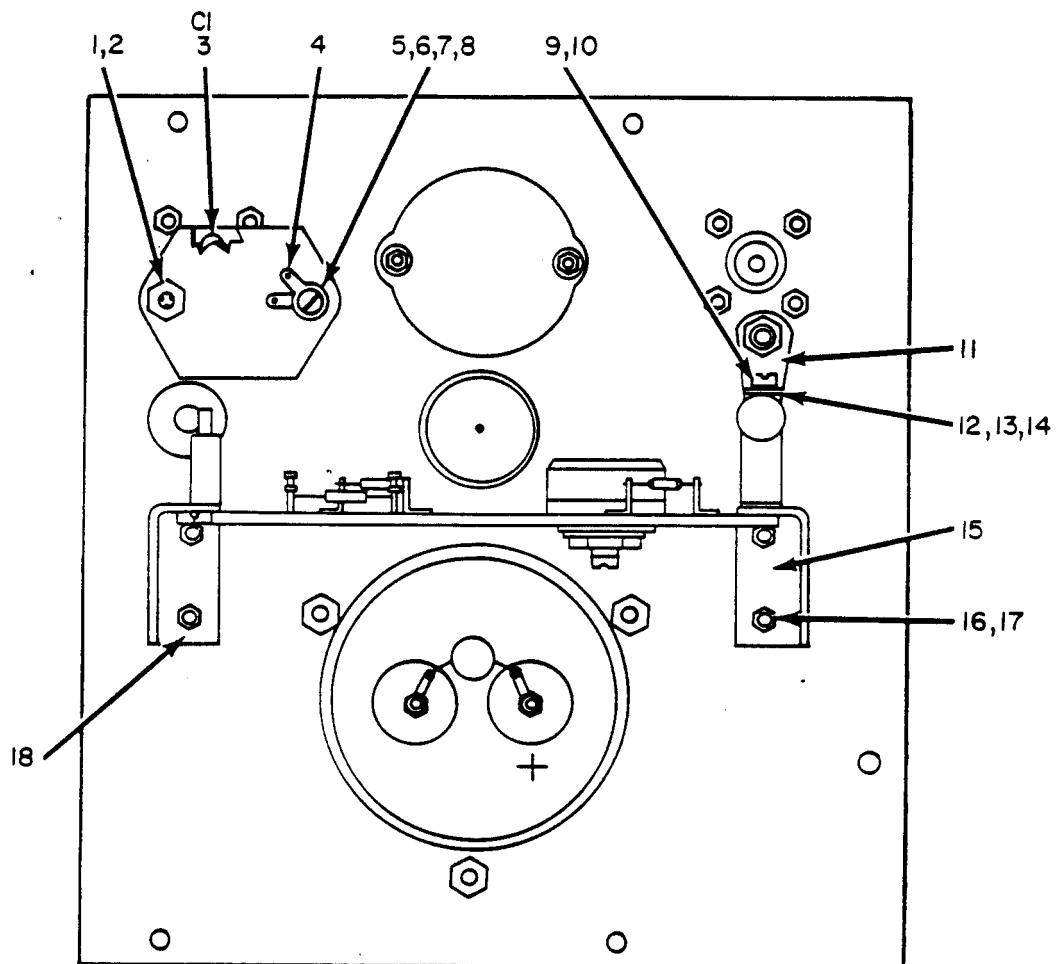

EL4CJ004

Figure 4. Standing-Wave-Ratio Power Meter ME-165/G, Front Panel Assembly.

TM11-6625-333-24P								
SECTION II (1) ILLUSTRATION (a)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT	
4	1	XDFZZ		96906	MS13795-6	WASHER,FLAT	EA	5
4	2	XDFZZ		80063	SMB349724	SPACER,SLEEVE	EA	1
4	3	PAHZZ	5910-00-998-9026	81349	CM55BK390JN3	CAPACITOR,FIXED,MIC USED ON ORDER NO 3219-PP-59 AND 3241-PP-59 REF DES WILL BE C1	EA	1
4	3	XDHZZ		81349	CM55BK390J03	CAPACITOR,FXD,MICA USED ON ALL ORDERS PRIOR TO NC 3219-PP-59 REF DES WILL BE C8	EA	1
4	4	XDHZZ		80063	SMD349721-7	TERMINAL LUG	EA	2
4	5	XOFZZ	5305-00-984-4992	96906	MS35206-232	SCREW,MACHINE	EA	1
4	6	XOFZZ	5310-00-184-8977	96906	MS35338-98	WASHER,LOCK	EA	2
4	7	XDFZZ	5310-00-934-9747	96906	MS35649-262	NUT,PLAIN,HEXAGO	EA	3
4	8	XOFZZ	5970-00-178-1152	81349	NL522W01-008	INSULATOR,STANDO	EA	2
4	9	XDHZZ	5305-00-059-8249	96906	MS35231-27	SCREW,MACHINE	EA	10
4	10	XOFZZ	5310-00-045-4007	96906	MS35338-41	WASHER,LOCK	EA	10
4	11	XOFZZ		80063	SMB349740	BRACKET,CAP MTG	EA	1
4	12	XDFZZ	5940-00-050-2308	96906	MS35431-3	TERMINAL,LUG	EA	1
4	13	ZDFZZ		80063	SMD349721-21	NUT,PLAIN,HEXAGON	EA	1
4	14	XDFZZ	5310-00-022-8834	96906	MS35333-91	WASHER,LOCK	EA	1
4	15	XDFZZ		80063	SMB349736	BRACKET,MOUNTING,RP	EA	1
4	16	XDFZZ	5310-00-584-5272	96906	MS35338-10	WASHER,LOCK	EA	3
4	17	XDFZZ		96906	MS35231-12	SCREW,MACHINE	EA	3
4	18	XDFZZ		80063	SMB349738	BRACKET,MOUNTING,LH	EA	1

TM 11-6625-333-24P

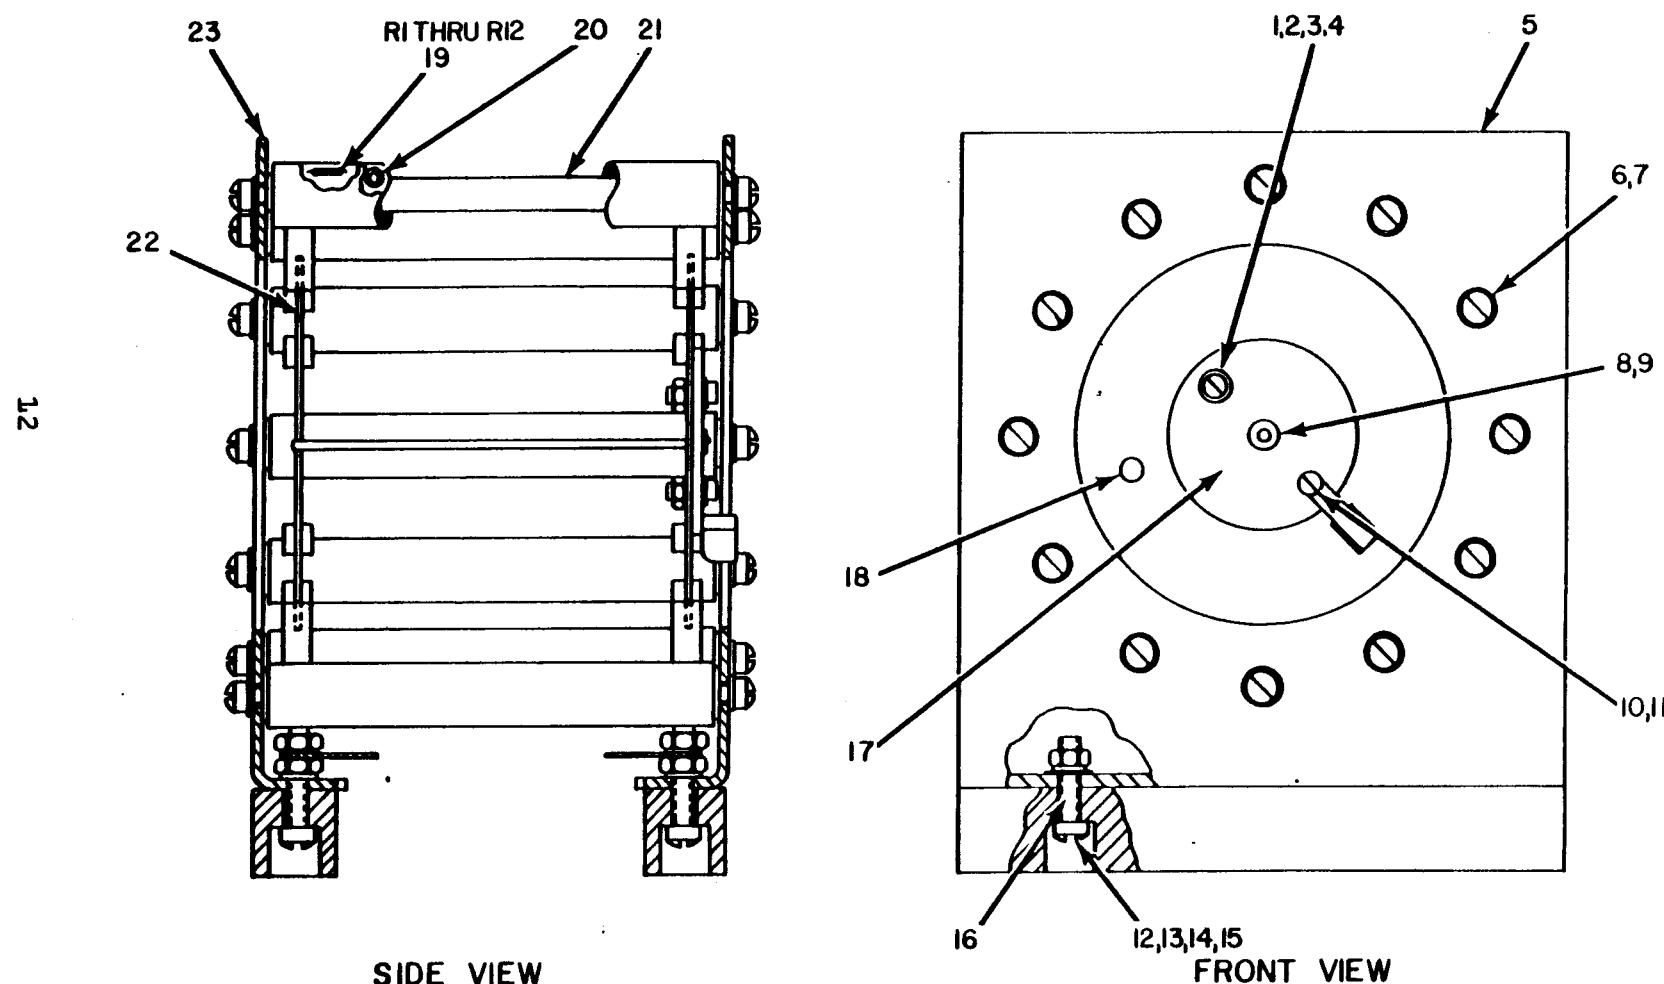


Figure 5. Turret Assembly.

EL4CJ005

TM11-6625-333-24P								
SECTION II (a) FIG NO	(2) (b) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) FSCM	(6) PART NUMBER	(7)	(8) QTY INC IN UNIT	
GROUP 0102 TURRET ASSEMBLY								
5	1	XDFZZ	5305-00-889-2997	96906	MS35206-215	SCREW,MACHINE	EA	2
5	2	XDFZZ	5310-00-193-7618	96906	MS15795-3	WASHER,FLAT	EA	1
5	3	XDFZZ	5310-00-045-3299	96906	MS35338-4	WASHER,LOCK	EA	2
5	4	XDFZZ	5310-00-193-7577	96906	MS35333-36	WASHER,LOCK	EA	1
5	5	XDFZZ		80063	SMC349730-1	BRACKET,TURRET	EA	1
5	6	XDFZZ	5305-00-614-0270	96906	MS35263-44	SCREW,MACHINE	EA	24
5	7	XDFZZ	5310-00-543-2410	96906	MS35338-40	WASHER,LOCK	EA	24
5	8	XDFZZ		57771	A1226	EYELET,METALLIC	EA	1
5	9	XDFZZ		80063	SMD349729-1	WIRE,ELECTRICAL	FT	V
5	10	XDFZZ	5310-00-934-9739	96906	MS35649-41	NUT,PLAIN,HEXAGO	EA	2
5	11	XDFZZ	5305-00-993-1848	96906	MS35207-265	SCREW,MACHINE	EA	2
5	12	XDFZZ	5305-00-993-1851	96906	MS35207-267	SCREW,MACHINE	EA	2
5	13	PAHZZ	5310-00-809-8546	96906	MS15795-8	WASHER,FLAT	EA	4
5	14	XDFZZ	5310-00-934-9758	96906	MS35649-202	NUT,PLAIN,HEXAGO	EA	4
5	15	XDFZZ	5310-00-045-3296	96906	MS35338-43	WASHER,LOCK	EA	6
5	16	XDFZZ		80063	SMB349731	SPACER,BLOCK	EA	2
5	17	XDFZZ		80063	SMB349732	INSULATOR,DISK	EA	1
5	18	XDHZZ		80063	SM-B-349733-1	CONTACT,ELECTRICAL	EA	1
5	19	XDFZZ	5905-00-683-2198	80063	SMB349735	RESISTOR,FIXED,W	EA	12
5	20	XDFZZ		80063	SMD349729-6	WASHER,SPRING	EA	24
5	21	XDFZZ		80063	SMB349734	SPACER,SLEEVE	EA	12
5	22	XDHZZ		80063	SM-D-349733-2	CONTACT,ELECTRICAL	EA	1
5	23	XDFZZ		80063	SMC349730-2	BRACKET,TURRET	EA	1

NATIONAL STOCK NUMBER AND PART NUMBER INDEX					
STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5310-00-022-8834	4	14	5905-00-681-8657	3	17
5310-00-045-3296	5	15	5905-00-683-2198	5	19
5310-00-045-3299	5	3	5930-00-685-9937	2	6
5310-00-045-4007	3	8	5905-00-685-9939	3	5
5310-00-045-4007	4	10	5905-00-717-3339	3	3
5940-00-050-2308	3	9	5905-00-717-3339	3	3
5940-00-050-2308	4	12	5905-00-779-8376	3	15
5305-00-059-8249	4	9	5905-00-779-8376	3	15
5310-00-080-8495	1	14	5310-00-809-8546	5	13
5305-00-082-6721	1	15	5910-00-822-5682	2	5
5910-00-138-1681	2	5	5910-00-822-5682	3	16
5910-00-138-1681	2	5	5910-00-822-5682	2	16
5355-00-168-3106	1	18	5310-00-880-5976	2	3
5970-00-178-1152	4	8	5310-00-880-5978	1	8
5310-00-184-8977	4	6	5905-00-882-0070	3	1
5905-00-193-5186	3	18	5905-00-882-0070	3	1
5310-00-193-7577	5	4	5305-00-889-2997	5	1
5310-00-193-7618	5	2	5905-00-900-3559	3	20
5305-00-207-7465	1	11	5905-00-900-3559	3	20
5310-00-261-8278	1	24	5310-00-903-5966	1	17
5940-00-296-5946	3	4	5310-00-934-9739	1	10
5935-00-331-3580	1	13	5310-00-934-9739	5	10
5905-00-542-8052	2	8	5310-00-934-9747	1	1
5310-00-543-2410	1	12	5310-00-934-9747	3	7
5310-00-543-2410	2	4	5310-00-934-9747	4	7
5310-00-543-2410	5	7	5310-00-934-9758	5	14
5310-00-543-2740	1	16	5305-00-984-4992	4	5
5305-00-576-7679	3	10	5305-00-984-6192	1	7
5310-00-584-5272	4	16	5910-00-984-8373	3	6
5305-00-614-0270	5	6	5305-00-993-1848	5	11
5961-00-669-6884	3	13	5305-00-993-1851	5	12
5910-00-676-7547	3	14	5910-00-998-9026	4	3
6625-00-678-9669	1	3			
FSCM	PART NUMBER	FIGURE NO.	ITEM NO.	FSCM	FIGURE NO.
57771	A1226	5	8	96906	MS35649-2E 1
81349	CK62BX102K	2	5	96906	MS35649-2E 3
81349	CK62BX102K	3	16	96906	MS35649-2E 4
81349	CK62BX102M	2	5	96906	MS35649-41 1
81349	CM15FD101GP3	33	6	96906	MS35649-41 5
81349	CM55BK390J03	4	3	96906	MS51957-811
81349	CM55B390JN3	4	3	96906	MS51971-1 1
81349	JAN1N277	3	13	81349	NL522W01-C 4
81349	JAN1N69A	3	13	71590	PA279-1694 2
96906	MS13795-6	4	1	81349	RL20S510J 3
96906	MS15795-3	5	2	81349	RL20S562J 3
96906	MS15795-8	5	13	81349	RL20S122J 3
96906	MS15795-806	2	3	81349	RL20S271J 3
96906	MS15795-807	1	8	81349	RL20S510J 3
96906	MS35206-215	5	1	81349	RL2051224 3
96906	MS35206-232	4	5	81349	RL205271J 3
96906	MS35206-244	1	7	81349	RL205562J 3
96906	MS35207-265	5	11	81349	RV4NATSB25 2
96906	MS35207-267	5	12	81349	RV4NAYS25 2
96906	MS35214-14	1	11	81349	RV4NAYS10C 3
96906	MS35231-12	4	17	80063	SM-B-34973 5
96906	MS35231-14	2	2	80063	SM-B-34974 2
96906	MS35231-27	4	9	80063	SM-D-34972 1
96906	MS35231-28	3	10	80063	SM-D-34972 1
96906	MS35263-44	5	6	80063	SM-D-34972 1
96906	MS35321-31	1	2	80063	SM-D-34972 3
96906	MS35333-36	5	4	80063	SM-D-34972 2
96906	MS35333-74	1	16	80063	SM-D-34973 5
96906	MS35333-91	4	14	80063	SMB349724 4
96906	MS35338-10	4	16	80063	SMB349725 1
96906	MS35338-100	1	24	80063	SMB349726 1
96906	MS35338-4	5	3	80063	SMB349727 1
96906	MS35338-40	1	12	80063	SMB349728 1
96906	MS35338-40	2	4	80063	SMB349731 5
96906	MS35338-40	5	7	80063	SMB349732 5
96906	MS35338-41	3	8	80063	SMB349734 5
96906	MS35338-41	4	10	80063	SMB349735 5
96906	MS35338-43	5	15	80063	SMB349736 4
96906	MS35338-98	4	6	80063	SMB349738 4
96906	MS35425-39	1	14	80063	SMB349740 4
96906	MS35431-3	3	9	80063	SMB349741-3
96906	MS35431-3	4	12	80063	SMB349741-3
96906	MS35649-202	5	14	80063	SMB349742 3

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.	FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
80063	SMC349730-1	5	5	80063	SMD349743	1	4
80063	SMC349730-2	5	23	81350	OG-588/U	1	13
80063	SMD349721-10	1	19	73899	VC13GB	3	14
80063	SMD349721-19	1	23	71729	X2090BG	3	11
80063	SMD349721-21	4	13	56289	10N1T4K	3	18
80063	SMD349721-7	4	4	72512	1470C	1	18
80063	SMD349722	1	6	56289	25N1T1200	3	5
80063	SMD349729-1	5	9				
80063	SMD349729-6	5	20	81312	750	3	4



## RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

**SOMETHING WRONG WITH THIS PUBLICATION?**

THEN... JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM. CAREFULLY TEAR IT  
OUT, FOLD IT AND DROP IT  
IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)  
Commander  
Stateside Army Depot  
ATTN: AMSTA-US  
Stateside, N.J. 07703

DATE SENT  
10 July 1975

PUBLICATION NUMBER				PUBLICATION DATE	PUBLICATION TITLE
TM 11-5840-340-20P				23 Jan 78	Radar Set AN/PRC-76
BE EXACT PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:	
PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO	<p>For item 2, change the NSN to read: 5835-00-134-9186.  <u>Reason:</u> Accuracy.</p> <p>Identify the cover on the junction box (item no. 5).  <u>Reason:</u> It is a separate item and is not called out on figure 19.</p> <p>Add the cover of the junction box as an item in the listing for figure 19.  <u>Reason:</u> Same as above</p> <p style="text-align: right;">E A M P L E</p>	
33		19			
44					
45					

PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER  
SSG I. M. DeSpirit of 999-1776

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS  
ARE OBSOLETE.

PS--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS



RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



**SOMETHING WRONG** WITH THIS PUBLICATION?

*THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.*

FROM (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-333-24P

PUBLICATION DATE

24 AUG 1981

PUBLICATION TITLE

Standing-Wave-Ratio Power Meter  
ME-165/G

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
---------	------------	-----------	----------

IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2  
1 JUL 79

PREVIOUS EDITIONS  
ARE OBSOLETE

P.S. --IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

## **RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS**



**SOMETHING WRONG WITH THIS PUBLICATION?**

THEN JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM. CAREFULLY TEAR IT  
OUT, FOLD IT AND DROP IT  
IN THE MAIL.

**FROM:** (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

**PUBLICATION NUMBER**

TM 11-6625-333-24P

**PUBLICATION DATE**

24 AUG 1981

**PUBLICATION TITLE**

**Standing-Wave-Ratio Power Meter  
ME-165/G**

**BE EXACT PIN-POINT WHERE IT IS**

**IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

**PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER**


**SIGN HERE**

**DA FORM 1 JUL 79 2028-2**

PREVIOUS EDITIONS  
ARE OBSOLETE

P.S.-IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

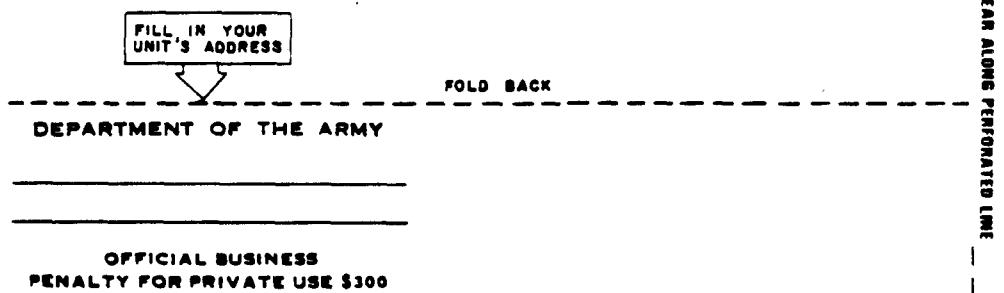

TEAR ALONG PERFORATED LINE

Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

## **RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS**



**SOMETHING WRONG WITH THIS PUBLICATION?**

THEN JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM. CAREFULLY TEAR IT  
OUT. FOLD IT AND DROP IT  
IN THE MAIL.

**FROM** (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER  
TM 11-6625-333-24P

PUBLICATION DATE  
24 AUG 1981

**PUBLICATION TITLE**  
**Standing-Wave-Ratio Power Meter**  
**ME-165/G**

**BE EXACT PIN-POINT WHERE IT IS**

**IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:**

NO	GRAPH	NO	NO
PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER			
SIGN HERE			

**PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER**

**SIGN HERE**

**DA FORM 1 JUL 79 2028-2**

PREVIOUS EDITIONS  
ARE OBSOLETE

P.S.-IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

TEAR ALONG PERFORATED LINE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

By Order of the Secretary of the Army:

E. C. MEYER  
*General, United States Army*  
*Chief of Staff*

Official:

ROBERT M. JOYCE  
*Brigadier General, United States Army*  
*The Adjutant General*

DISTRIBUTION:

To be distributed in accordance with DA Form 12-51, Organizational maintenance requirements for AN/GRC-26 and AN/GRG-41.

PIN 033058-A00